

ID. 40032587



BLACK MONOCRYSTALLINE SOLAR MODULE

Q.PEAK BLK-G3 250-270

Aesthetics. Power.

With its top performances and completely black design, the new **Q.PEAK BLK-G3** is the aesthetic model athlete. The third module generation from Q CELLS has been optimised across the board: improved output yield, higher operating reliability and durability, quicker installation and more intelligent design – **MADE IN EUROPE**.

INNOVATIVE ALL-WEATHER TECHNOLOGY

- Maximum yields with **excellent low-light and temperature behaviour**.
- **Increased cell efficiency** due to full-square monocrystalline cells.

ENDURING HIGH PERFORMANCE

- **Long-term Yield Security** due to Anti PID Technology¹, Hot-Spot Protect, and Traceable Quality Tra.Q™.
- **Long-term stability** due to **VDE Quality Tested** – the strictest test program.

SAFE ELECTRONICS

- **Protection against short circuits and thermally induced power losses** due to breathable junction box and welded cables.
- **Increased flexibility** due to MC4-intermediate connectors.

PROFIT-INCREASING GLASS TECHNOLOGY

- **Reduction of light reflection** by 50%, plus **long-term corrosion resistance** due to high-quality »Sol-Gel roller coating« processing.

LIGHTWEIGHT QUALITY FRAME

- Stability at **wind loads of up to 5400 Pa** with a **module weight of just 19 kg** due to slim frame design with high-tech alloy.

MAXIMUM COST REDUCTIONS

- Up to **29 % lower logistics costs** due to higher module capacity per box.

EXTENDED WARRANTIES


- Investment security due to **12-year product warranty** and **25-year linear performance warranty**².



¹ APT test conditions: Cells at -1000 V against grounded, with conductive metal foil covered module surface, 25 °C, 168 h (TÜV test conditions)
² See data sheet on rear for further information.

MECHANICAL SPECIFICATION

| | |
|---------------------|--|
| Format | 1670 mm x 1000 mm x 35 mm (including frame) |
| Weight | 19 kg |
| Front Cover | 3.2 mm thermally pre-stressed glass with anti-reflection technology |
| Back Cover | Black composite film |
| Frame | Black anodised aluminium |
| Cell | 6 x 10 monocrystalline solar cells |
| Junction box | 110 mm x 115 mm x 23 mm Protection class IP67, with bypass diodes |
| Cable | 4 mm ² Solar cable; (+) 1210 mm, (-) 1210 mm |
| Connector | SOLARLOK PV4, IP68 |

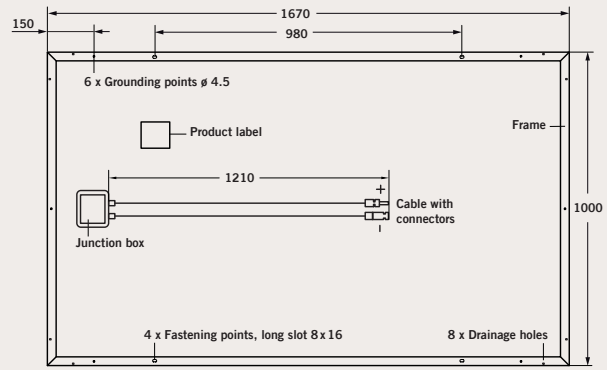

ELECTRICAL CHARACTERISTICS

PERFORMANCE AT STANDARD TEST CONDITIONS (STC: 1000 W/m², 25 °C, AM 1.5 G SPECTRUM)¹

| NOMINAL POWER (+5 W/-0 W) | | [W] | 250 | 255 | 260 | 265 | 270 |
|--|-----------|-----|--------|--------|--------|--------|--------|
| Average Power | P_{MPP} | [W] | 252.5 | 257.5 | 262.5 | 267.5 | 272.5 |
| Short Circuit Current | I_{SC} | [A] | 8.75 | 8.82 | 8.90 | 8.98 | 9.06 |
| Open Circuit Voltage | V_{OC} | [V] | 37.94 | 38.14 | 38.33 | 38.52 | 38.70 |
| Current at P_{MPP} | I_{MPP} | [A] | 8.26 | 8.35 | 8.45 | 8.54 | 8.64 |
| Voltage at P_{MPP} | V_{MPP} | [V] | 30.58 | 30.83 | 31.08 | 31.32 | 31.55 |
| Efficiency (Nominal Power) | η | [%] | ≥ 15.0 | ≥ 15.3 | ≥ 15.6 | ≥ 15.9 | ≥ 16.2 |


PERFORMANCE AT NORMAL OPERATING CELL TEMPERATURE (NOCT: 800 W/m², 47 ± 3 °C, AM 1.5 G SPECTRUM)²

| NOMINAL POWER (+5 W/-0 W) | | [W] | 250 | 255 | 260 | 265 | 270 |
|--|-----------|-----|-------|-------|-------|-------|-------|
| Average Power | P_{MPP} | [W] | 184.3 | 187.9 | 191.6 | 195.2 | 198.9 |
| Short Circuit Current | I_{SC} | [A] | 7.06 | 7.12 | 7.19 | 7.25 | 7.32 |
| Open Circuit Voltage | V_{OC} | [V] | 34.85 | 35.03 | 35.21 | 35.39 | 35.56 |
| Current at P_{MPP} | I_{MPP} | [A] | 6.60 | 6.68 | 6.75 | 6.82 | 6.90 |
| Voltage at P_{MPP} | V_{MPP} | [V] | 27.92 | 28.16 | 28.39 | 28.61 | 28.84 |

¹ Measurement tolerances STC: ± 3% (P_{MPP}); ± 10% (I_{SC} , V_{OC} , I_{MPP} , V_{MPP})

² Measurement tolerances NOCT: ± 5% (P_{MPP}); ± 10% (I_{SC} , V_{OC} , I_{MPP} , V_{MPP})


Q CELLS PERFORMANCE WARRANTY

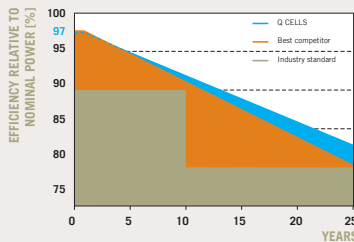

At least 97% of nominal power during first year. Thereafter max. 0.6% degradation per year.
At least 92% of nominal power after 10 years.
At least 83% of nominal power after 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organization of your respective country.

PERFORMANCE AT LOW IRRADIANCE

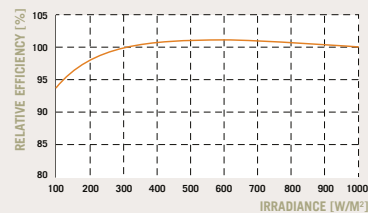

The typical change in module efficiency at an irradiance of 200 W/m² in relation to 1000 W/m² (both at 25 °C and AM 1.5 G spectrum) is -2% (relative).

TEMPERATURE COEFFICIENTS (AT 1000 W/m², 25 °C, AM 1.5 G SPECTRUM)

| | | | | | | | |
|--|----------|-------|-------|---|---------|-------|-------|
| Temperature Coefficient of I_{SC} | α | [%/K] | +0.04 | Temperature Coefficient of V_{OC} | β | [%/K] | -0.33 |
| Temperature Coefficient of P_{MPP} | γ | [%/K] | -0.43 | | | | |

PROPERTIES FOR SYSTEM DESIGN

| | | | | |
|--|------|------|--|---------------------|
| Maximum System Voltage V_{SYS} | [V] | 1000 | Safety Class | II |
| Maximum Reverse Current I_R | [A] | 20 | Fire Rating | C |
| Wind/Snow Load (in accordance with IEC 61215) | [Pa] | 5400 | Permitted module temperature on continuous duty | -40 °C up to +85 °C |

QUALIFICATIONS AND CERTIFICATES

VDE Quality Tested, IEC 61215 (Ed.2); IEC 61730 (Ed.1), Application class A
This data sheet complies with DIN EN 50380.



PARTNER

NOTE: Installation instructions must be followed. See the installation and operating manual or contact the technical service for further information on approved installation and use of this product.

Hanwha Q CELLS GmbH

Sonnenallee 17-21, 06766 Bitterfeld-Wolfen, Germany | TEL +49 (0)3494 66 99-23444 | FAX +49 (0)3494 66 99-23000 | EMAIL sales@q-cells.com | WEB www.q-cells.com

Q CELLS

a Hanwha company